




P63FC - 1C - 24VDC

Relay Type: P63/P60
 Contact Form: 1C/2C
 Coil Voltage:- 6 ~ 240VDC
 6 ~ 240VAC

Features	Dimension L * W * H (mm)	P63FC: 70 * 47 * 47 P60FC: 80 * 47 * 48			
	Terminal Type	Screw Terminal			
	Weight	160 gm Approximately			
Contact Data	Contact Form	1C/ 2C			
	Contact Material	Ag Alloy			
	Contact Capacity	1C: 63A/250VAC, 63A/28VDC 2C: 60A/250VAC, 60A/28VDC			
Coil Data	Coil Voltage (DC)	6 - 240 V			
	Coil Voltage (AC)	6 - 240 V			
	Coil Power Consumption	1C: 2.2W		2C: 3.6 W	
	Coil Specification	Coil Voltage	Coil Resistance (Ω) ±10%	Pull in Voltage (V)	Drop Out Voltage (V)
		12 VDC	65	80%	5%
24 VDC		252	80%	5%	
240 VAC	5200	85%	30%		
General Data	Dielectric Strength	1500 VAC @ 50 Hz / Min (Between Contacts)			
		2000 VAC @ 50 Hz / Min (Between Coil & Contacts)			
	Insulation Resistance	500MΩ			
	Electrical Life	1 x 10 ⁵	2C: 1 x 10 ⁴	(On Rated Resistive Load)	
	Mechanical Life	1 x 10 ⁷			
Operating Temperature	- 40 °C ~ + 55°C				

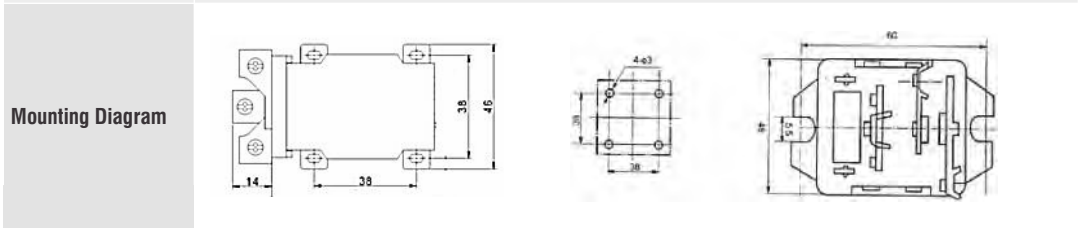

Application Inverter, Voltage stabilizer, High Power Application, Phase Changeovers, Motor Controller, Street Lighting, HVAC etc.